



COMIS IN



L max : 4500 mm

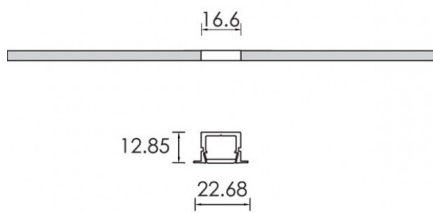

Lighting



TECHNICAL DETAILS

Housing :	Extruded aluminium
Diffuser :	Extruded PMMA
Control Gear :	Remote electronic transformer
IP :	40
IK :	05
Weight :	0.20 kg/m
	• LED replacement with tools

Colors

-10
White-20
Black-90
Anoxal matt

Accessories

DOUBLE SATIN
COVERLINEAR OPAL
COVERLENS SPOT
COVER

Lighting Sources

**LED Strip 24V | CRI>80 | 3000K / 4000K**

120 LED/m - 9.6W/m - 720Lm/m / 780Lm/m - cutting per 5cm

70 LED/m - 15W/m - 2000Lm/m / 2100Lm/m - cutting per 10cm

Lifetime: >30.000h | Energy Saving A+

Headoffice - Showroom: 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece. Tel: +30 210 28 51 304 Fax: +30 210 28 51 306

Factory - Financial Services: 5 Kefalovrisou Str., Monomati, Aharnai, P.O. Box 13677 Athens, Greece. Tel: +30 210 62 08 230 Fax: +30 210 62 08 262

website: www.bright.gr | **e-mail:** info@bright.gr