




FERUS SP LED

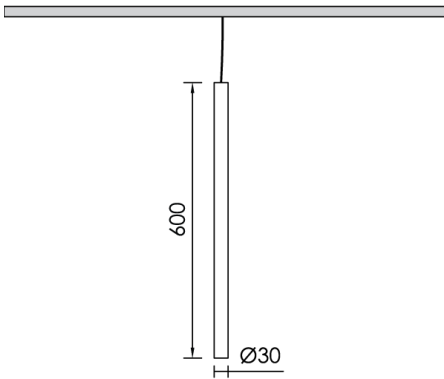

Lighting



Photometric



TECHNICAL DETAILS

Housing:	Extruded aluminium
Control Gear:	Remote electronic driver
Watt:	1W / 1.5W
Lenses:	14° / 30° / 60°
IP:	40
IK:	04
	<ul style="list-style-type: none"> Optional accessories LED replacement with tools

Colors



-10
White



-20
Black



-30
Grey

Accessories



BASE SQ BB3

COLORED
CABLES

Lighting Sources

**Module 1x H.P.LED - CRI80 - Ripple <3%**

1W - 350mA - 2700K - 150Lm | 1.5W - 500mA - 2700K - 210Lm

1W - 350mA - 3000K - 155Lm | 1.5W - 500mA - 3000K - 215Lm

1W - 350mA - 4000K - 170Lm | 1.5W - 500mA - 4000K - 230Lm

**Lenses: 25°/40°/Oval Beam 30*65° - Reflector: 10°/20°
3step MacAdam - LM80 test report - Lifetime>50.000h L80B10**

Headoffice - Showroom: 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece. Tel: +30 210 28 51 304 Fax: +30 210 28 51 306

Factory - Financial Services: 5 Kefalovrisou Str., Monomati, Aharai, P.O. Box 13677 Athens, Greece. Tel: +30 210 62 08 230 Fax: +30 210 62 08 262

website: www.bright.gr | **e-mail:** info@bright.gr