



NOTUS 16 LINEAR LENS LED

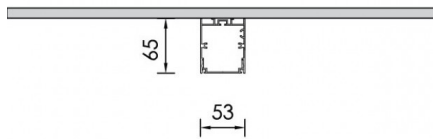

L max: 4500mm

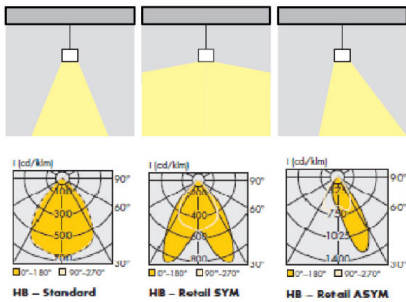

TECHNICAL DETAILS

Housing :	Extruded aluminium
Control Gear :	Built-in electronic driver
Reflector :	LED lens
IP :	40
IK :	04
	- Optional accessories - LED replacement with tools

Colors



Accessories


 AUTO WIRE
 SUPPORT BLOCK

Lighting Sources

**1x Lens Linear LED | 350mA | CRI85 | 3000K / 4000K**

300mm	- 4.90W	- 755Lm	- 153Lm/W	/	795Lm	- 161Lm/W
580mm	- 9.80W	- 1505Lm	- 153Lm/W	/	1585Lm	- 161Lm/W
860mm	- 14.70W	- 2260Lm	- 153Lm/W	/	2380Lm	- 161Lm/W
1140mm	- 19.60W	- 3010Lm	- 153Lm/W	/	3170Lm	- 161Lm/W
1420mm	- 24.50W	- 3765Lm	- 153Lm/W	/	3965Lm	- 161Lm/W
1700mm	- 29.40W	- 4515Lm	- 153Lm/W	/	4755Lm	- 161Lm/W
1980mm	- 34.30W	- 5270Lm	- 153Lm/W	/	5550Lm	- 161Lm/W
2260mm	- 39.20W	- 6020Lm	- 153Lm/W	/	6370Lm	- 161Lm/W
2540mm	- 44.10W	- 6775Lm	- 153Lm/W	/	7135Lm	- 161Lm/W
2820mm	- 49.00W	- 7525Lm	- 153Lm/W	/	7925Lm	- 161Lm/W
3100mm	- 53.90W	- 8280Lm	- 153Lm/W	/	8720Lm	- 161Lm/W
3380mm	- 58.80W	- 9030Lm	- 153Lm/W	/	9510Lm	- 161Lm/W
3660mm	- 63.70W	- 9785Lm	- 153Lm/W	/	10305Lm	- 161Lm/W
3940mm	- 68.60W	- 10535Lm	- 153Lm/W	/	11095Lm	- 161Lm/W
4220mm	- 73.50W	- 11290Lm	- 153Lm/W	/	11890Lm	- 161Lm/W
4500mm	- 78.40W	- 12040Lm	- 153Lm/W	/	12680Lm	- 161Lm/W

2step MacAdam | Ripple < 3%
Lifetime>50.000h | LM80 test report

Headoffice - Showroom: 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece. Tel: +30 210 28 51 304 Fax: +30 210 28 51 306

Factory - Financial Services: 5 Kefalovrisou Str., Monomati, Aharnai, P.O. Box 13677 Athens, Greece. Tel: +30 210 62 08 230 Fax: +30 210 62 08 262

website: www.bright.gr | **e-mail:** info@bright.gr