



NOTUS 19 H.P.LED



L max: 4500mm

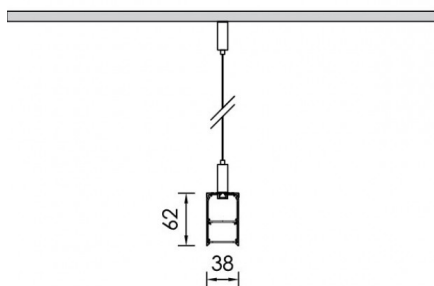

Lighting



TECHNICAL DETAILS

Housing :	Extruded aluminium
Control Gear :	Built-in electronic driver
Reflector :	Circular (10°, 20°)
Lenses :	25° / 40°
IP :	40
IK :	04
	<ul style="list-style-type: none"> Optional accessories LED replacement with tools

Colors

-10
White-20
Black-90
Anoxal matt

Accessories

CONVERSION
KIT+BATTERYAUTO WIRE
SUPPORT BLOCK

Lighting Sources

**H.P.LED 10W - 34.4W**

350mA

From: 10W - 2700K - 1500Lm - 150Lm/W

To: 24W - 4000K - 4080Lm - 170Lm/W

500mA

From: 14.4W - 2700K - 2100Lm - 147Lm/W

To: 34.4W - 4000K - 5520Lm - 160Lm/W

Lenses: 25°/40°/Oval Beam 30°/65° | Reflector: 10°/20°

For further information please see above at more info

Headoffice - Showroom: 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece. Tel: +30 210 28 51 304 Fax: +30 210 28 51 306

Factory - Financial Services: 5 Kefalovrisou Str., Monomati, Aharnai, P.O. Box 13677 Athens, Greece. Tel: +30 210 62 08 230 Fax: +30 210 62 08 262

website: www.bright.gr | **e-mail:** info@bright.gr