



## NOTUS 19 SPOT LINEAR LED

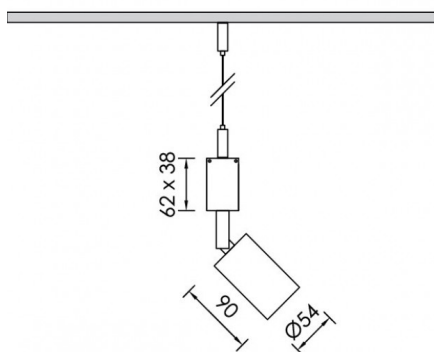


L max: 4500mm

L max: 4500mm

Lighting



Photometric



## TECHNICAL DETAILS

<b>Housing :</b>	Extruded aluminium
<b>Diffuser :</b>	Matt opal cover of extruded PMMA
<b>Rotation :</b>	Vertical 90° / Horizontal 360°
<b>Control Gear :</b>	Built-in electronic driver
<b>Watt :</b>	Max 50W / Max 131.2W
<b>IP :</b>	40
<b>IK :</b>	04
	<ul style="list-style-type: none"> <li>Lamp replacement without tools</li> <li>LED replacement with tools</li> </ul>

## Colors



-10

White



-20

Black



-30

Grey



-90

Anoxal matt



-50

Chrome



-55

Inox

## Accessories

CONVERSION  
KIT+BATTERYAUTO WIRE  
SUPPORT BLOCK

## Lighting Sources

**ES50/GU10/230V**

Halogen Lamp

**PAR16/GU10/230V**

Halogen Lamp

**CFL/GU10/230V**

Compact Fluorescent Lamp

**1x Linear LED | CR180**

3000K / 4000K |

**3step MacAdam | Ripple < 3% | Lifetime>50.000h | LM80 test report**

**Headoffice - Showroom:** 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece. Tel: +30 210 28 51 304 Fax: +30 210 28 51 306

**Factory - Financial Services:** 5 Kefalovrisou Str., Monomati, Aharnai, P.O. Box 13677 Athens, Greece. Tel: +30 210 62 08 230 Fax: +30 210 62 08 262

**website:** [www.bright.gr](http://www.bright.gr) | **e-mail:** [info@bright.gr](mailto:info@bright.gr)