



NOTUS 19 SURFACE LINEAR LED




L max: 1140mm

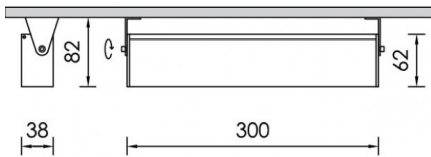

Lighting



Photometric



TECHNICAL DETAILS

Housing :	Extruded aluminium
Diffuser :	Matt opal cover of extruded PMMA
Rotation :	Vertical 90°
Control Gear :	Built-in electronic driver
Watt :	Max 32.80W
IP :	40
IK :	04
	<ul style="list-style-type: none"> Optional accessories LED replacement with tools

Colors

-10
White-20
Black-90
Anoxal matt

Accessories

CONVERSION
KIT+BATTERY

Lighting Sources

**1x Linear LED | 6.10W-32W | CRI80**

300mm

6.10W - 3000K - 884Lm - 145Lm/W | 4000K - 931Lm - 153Lm/W

8.20W - 3000K - 1250Lm - 152Lm/W | 4000K - 1310Lm - 160Lm/W

5.90W - 3000K - 870Lm - 147Lm/W | 4000K - 910Lm - 154Lm/W

8.00W - 3000K - 1280Lm - 160Lm/W | 4000K - 1340Lm - 167Lm/W

590mm

12.10W - 3000K - 1748Lm - 145Lm/W | 4000K - 1834Lm - 152Lm/W

16.40W - 3000K - 2480Lm - 152Lm/W | 4000K - 2610Lm - 160Lm/W

11.80W - 3000K - 1730Lm - 147Lm/W | 4000K - 1810Lm - 153Lm/W

16.00W - 3000K - 2560Lm - 160Lm/W | 4000K - 2670Lm - 167Lm/W

875mm

18.20W - 3000K 2632Lm - 145Lm/W | 4000K 2765Lm - 152Lm/W

24.60W - 3000K - 3730Lm - 151Lm/W | 4000K- 3920Lm - 159Lm/W

17.70W - 3000K - 2600Lm - 147Lm/W | 4000K - 2720Lm - 153Lm/W

24.00W - 3000K - 3840Lm - 160Lm/W | 4000K - 4010Lm - 167Lm/W

1155mm

24.20W - 3000K 3496Lm - 145Lm/W | 4000K 3667Lm - 152Lm/W

32.80W - 3000K - 4960Lm - 152Lm/W | 4000K- 5220Lm - 159Lm/W

23.60W - 3000K - 3460Lm - 147Lm/W | 4000K - 3620Lm - 153Lm/W

32.00W - 3000K - 5120Lm - 160Lm/W | 4000K - 5340Lm - 167Lm/W

Lifetime: 50.000h (L80B10)

Headoffice - Showroom: 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece. Tel: +30 210 28 51 304 Fax: +30 210 28 51 306

Factory - Financial Services: 5 Kefalovrisou Str., Monomati, Aharnai, P.O. Box 13677 Athens, Greece. Tel: +30 210 62 08 230 Fax: +30 210 62 08 262

website: www.bright.gr | **e-mail:** info@bright.gr