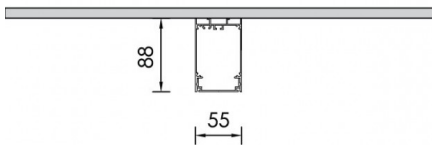


NOTUS 5 LINEAR LENS LED



TECHNICAL DETAILS

Housing :	Extruded aluminium
Control Gear :	Built-in electronic driver
Reflector :	LED lens
Watt :	Max 168W
IP :	40
IK :	04
	<ul style="list-style-type: none"> Optional accessories LED replacement with tools

Colors



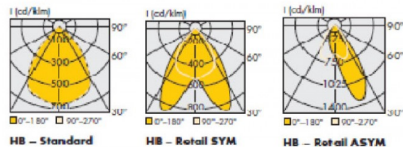
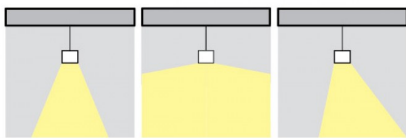
Accessories

NOTUS 5
ANGULARAUTO WIRE
SUPPORT BLOCK

Lighting Sources



L max: 4500mm

**1x Lens Linear LED | 350mA | CRI85 | 3000K / 4000K**

300mm - 4.90W - 755Lm - 153Lm/W / 795Lm - 161Lm/W
580mm - 9.80W - 1505Lm - 153Lm/W / 1585Lm - 161Lm/W
860mm - 14.70W - 2260Lm - 153Lm/W / 2380Lm - 161Lm/W
1140mm - 19.60W - 3010Lm - 153Lm/W / 3170Lm - 161Lm/W
1420mm - 24.50W - 3765Lm - 153Lm/W / 3965Lm - 161Lm/W
1700mm - 29.40W - 4515Lm - 153Lm/W / 4755Lm - 161Lm/W
1980mm - 34.30W - 5270Lm - 153Lm/W / 5550Lm - 161Lm/W
2260mm - 39.20W - 6020Lm - 153Lm/W / 6370Lm - 161Lm/W
2540mm - 44.10W - 6775Lm - 153Lm/W / 7135Lm - 161Lm/W
2820mm - 49.00W - 7525Lm - 153Lm/W / 7925Lm - 161Lm/W
3100mm - 53.90W - 8280Lm - 153Lm/W / 8720Lm - 161Lm/W
3380mm - 58.80W - 9030Lm - 153Lm/W / 9510Lm - 161Lm/W
3660mm - 63.70W - 9785Lm - 153Lm/W / 10305Lm - 161Lm/W
3940mm - 68.60W - 10535Lm - 153Lm/W / 11095Lm - 161Lm/W
4220mm - 73.50W - 11290Lm - 153Lm/W / 11890Lm - 161Lm/W
4500mm - 78.40W - 12040Lm - 153Lm/W / 12680Lm - 161Lm/W

2step MacAdam | Ripple < 3%
Lifetime>50.000h | LM80 test report

Headoffice - Showroom: 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece. Tel: +30 210 28 51 304 Fax: +30 210 28 51 306

Factory - Financial Services: 5 Kefalovrisou Str., Monomati, Aharnai, P.O. Box 13677 Athens, Greece. Tel: +30 210 62 08 230 Fax: +30 210 62 08 262

website: www.bright.gr | **e-mail:** info@bright.gr