

ISKRA LED ALFA PROG



Application: urban roads, residential roads (internal), parks, pedestrians, bicycle routes

Assembly: pole top mounted $\varnothing 60 \times 80$ mm

Ingress protection: IP 66 for the optical part and the driver

Material: anodised aluminium alloy

Colour: inox / black

Optical system: PMMA optics

Number of LEDs: 12

Operating temperature range: from -40°C to $+55^{\circ}\text{C}$

Expected useful lifetime: L90F10 - 50 000 h, L80F20 - 100000 h


CRI: >70 for 5000K, 4000K; >80 for 3500K, 2700K

Input voltage frequency: 50 - 60Hz

Power factor: ≥ 0.95

Inrush current: : 22A / 290 μs

Luminaire ISKRA LED ALFA PROG has the possibility to connect to an external control system via DALI interface (optionally via analog signal 1- 10V).




Code	Symbol	LED power	Luminaire Power consumption	LED forward current	Colour temperature (CCT)	LEDs luminous flux ²⁾	Luminaire luminous flux ²⁾	Luminous efficacy	Unit volume	Net weight
2133130/1/... ¹⁾	ISKRA LED ALFA 24 PROG	24W	28W	700mA	2700K	3 600lm	3300lm	118lm/W	0,01m ³	2,5kg
2133130/3/... ¹⁾	ISKRA LED ALFA 24 PROG	24W	28W	700mA	3500K	3 700lm	3400lm	122lm/W	0,01m ³	2,5kg
2133130/4/... ¹⁾	ISKRA LED ALFA 24 PROG	24W	28W	700mA	4000K	4 200lm	3850lm	138lm/W	0,01m ³	2,5kg
2133130/6/... ¹⁾	ISKRA LED ALFA 24 PROG	24W	28W	700mA	5000K	4 250lm	3900lm	140lm/W	0,01m ³	2,5kg
2133132/1/... ¹⁾	ISKRA LED ALFA 36 PROG	36W	40W	1000mA	2700K	4 900lm	4500lm	113lm/W	0,01m ³	2,5kg
2133132/3/... ¹⁾	ISKRA LED ALFA 36 PROG	36W	40W	1000mA	3500K	5 100lm	4750lm	119lm/W	0,01m ³	2,5kg
2133132/4/... ¹⁾	ISKRA LED ALFA 36 PROG	36W	40W	1000mA	4000K	5 800lm	5400lm	135lm/W	0,01m ³	2,5kg
2133132/6/... ¹⁾	ISKRA LED ALFA 36 PROG	36W	40W	1000mA	5000K	5 900lm	5500lm	137lm/W	0,01m ³	2,5kg

1) Symbol of chosen optical system eg. 2133130/6/T2 is ISKRA LED ALFA 24 PROG 5000K with T2 optical system


2) tolerance +/- 3% due to LEDs accuracy

Directive: 2014/35/UE (Official Journal of the UE L 96/357 29.03.2014), 2014/30/UE (Official Journal of the UE L 96/79 29.03.2014), 2011/65/UE, 2009/125/EC
Shown parameters based on measurements according to IESNA LM 79-08

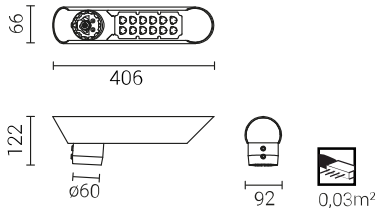


ISKRA LED ALFA PROG


SP




T2




T3




ME



DW



T4



Acceptable quantity of luminaires ISKRA LED ALFA PROG on one circuit, protected by:

Overcurrent switches MCB type B or C

Luminaire	Typ	2A	4A	6A	10A	16A	20A	25A
ISKRA LED PROG	B	2	4	8	12	20	25	31
	C	2	8	12	20	34	41	52

Fuse – type gG and GL

Luminaire	2A	4A	6A	10A	16A	20A	25A
ISKRA LED PROG	4	9	14	25	39	50	62