



LIGHTING BOOK

2017

VOL 1



TRIGON LIGHTING

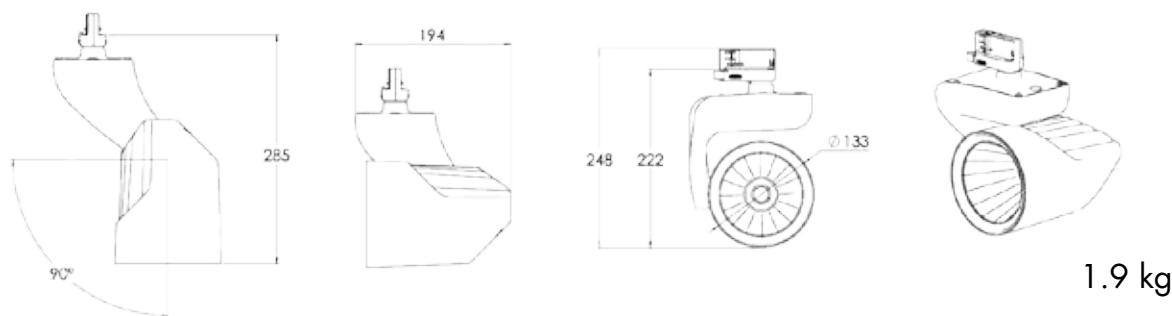

BIG WAVE



BIG WAVE led spotlight series is designed for retail lighting. With the most advanced technology in the market. Spotlight contains a passive cooling system. Our line of WAVE lighting has a Zen design that will show your product in its best light. The lighting becomes a part of your display in a way which no other light fixture can.

BIG WAVE



Product	Part #	LES mm	Cct	Min CRI	GAI BB15	CQS	R9	Rf	Rg	Drive Current	Volt	Watt	Lumens
Big Wave 3000K	CXM-18-27-90-36-AA30-F4-3	18	2700	90	118	90	90	88	103	500mA	36	18	2340
										700mA	36	25.2	3024
										900mA	36	32.4	3855
										1150mA	36	41.4	4554
Big Wave 3500K	CXM-18-30-90-36-AA30-F4-3	18	3000	90	118	90	80	88	103	500mA	36	18	2520
										700mA	36	25.2	3400
										900mA	36	32.4	4185
										1150mA	36	41.4	4968
Big Wave accurate WHITE	CXM-18-30-95-36-AA30-F4-3	18	3000	95	118	90	90	88	103	500mA	36	18	2368
										700mA	36	25.2	3196
										900mA	36	32.4	3910
										1150mA	36	41.4	4670
Big Wave accurate WHITE	CXM-18-30-95-36-AA30-F4-3	18	3500	90	118	90	80	88	103	500mA	36	18	2610
										700mA	36	25.2	3578
										900mA	36	32.4	4270
										1150mA	36	41.4	5382
Big Wave 3500K	CXM-18-35-95-36-AA30-F4-3	18	3500	95	118	90	90	88	103	500mA	36	18	2454
										700mA	36	25.2	3364
										900mA	36	32.4	4013
										1150mA	36	41.4	5056
Big Wave 3500K	CXM-18-40-90-36-AA30-F4-3	18	4000	90	118	90	80	88	103	500mA	36	18	2628
										700mA	36	25.2	3528
										900mA	36	32.4	4500
										1150mA	36	41.4	5630
Big Wave 3500K	CXM-18-35-95-36-AA30-F4-3	18	4000	95	118	90	90	88	103	900mA	36	32.4	2470
										1050mA	36	37.8	3316
										1200mA	36	43.2	4230
										1400mA	36	50.4	5292
Big Wave 4000K	CXM-18-50-90-36-AA30-F4-3	18	5000	90	118	90	80	88	103	500mA	36	18	2678
										700mA	36	25.2	3578
										900mA	36	32.4	4525
										1150mA	36	41.4	5655
Taylor-Made APP 		Call us and a representative will meet you, we will build together a TAYLOR-MADE APP suited especially for your business.											

* Due to Rapid development in the LED market, please ask for the latest version of data sheet.

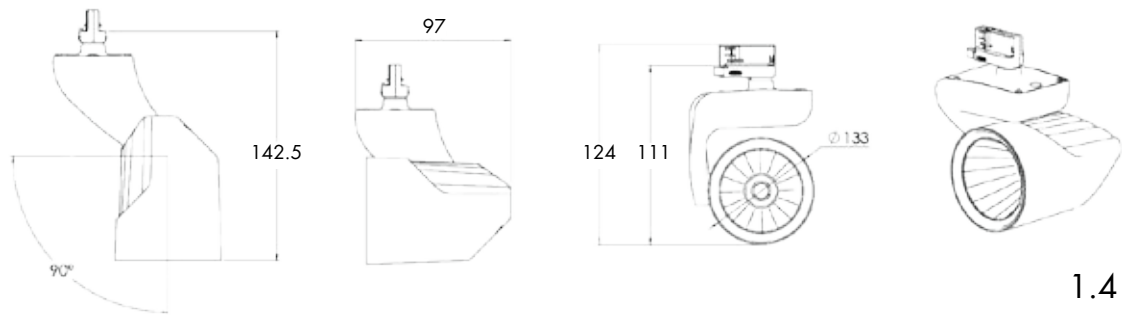

1.4 kg

SMALL WAVE

SMALL WAVE led spotlight series is designed for retail lighting. With the most advanced technology in the market. Spotlight contains a passive cooling system. Our line of WAVE lighting has a Zen design that will show your product in its best light. The lighting becomes a part of your display in a way which no other light fixture can.

SMALL WAVE



Product	Part #	LES mm	Cct	Min CRI	GAI BB15	CQS	R9	Rf	Rg	Drive Current	Volt	Watt	Lumens
Small Wave 3000K	CXM-18-27-90-36-AA30-F4-3	18	2700	90	118	90	90	88	103	500mA	36	18	2340
										700mA	36	25.2	3024
										900mA	36	32.4	3855
										1150mA	36	41.4	4554
Small Wave 3500K	CXM-18-30-90-36-AA30-F4-3	18	3000	90	118	90	80	88	103	500mA	36	18	2520
										700mA	36	25.2	3400
										900mA	36	32.4	4185
										1150mA	36	41.4	4968
Small Wave accurate WHITE	CXM-18-30-95-36-AA30-F4-3	18	3000	95	118	90	90	88	103	500mA	36	18	2368
										700mA	36	25.2	3196
										900mA	36	32.4	3910
										1150mA	36	41.4	4670
Small Wave accurate WHITE	CXM-18-30-95-36-AA30-F4-3	18	3500	90	118	90	80	88	103	500mA	36	18	2610
										700mA	36	25.2	3578
										900mA	36	32.4	4270
										1150mA	36	41.4	5382
Small Wave 3500K	CXM-18-35-95-36-AA30-F4-3	18	3500	95	118	90	90	88	103	500mA	36	18	2454
										700mA	36	25.2	3364
										900mA	36	32.4	4013
										1150mA	36	41.4	5056
Small Wave 3500K	CXM-18-40-90-36-AA30-F4-3	18	4000	90	118	90	80	88	103	500mA	36	18	2628
										700mA	36	25.2	3528
										900mA	36	32.4	4500
										1150mA	36	41.4	5630
Small Wave 3500K	CXM-18-35-95-36-AA30-F4-3	18	4000	95	118	90	90	88	103	900mA	36	32.4	2470
										1050mA	36	37.8	3316
										1200mA	36	43.2	4230
										1400mA	36	50.4	5292
Small Wave 4000K	CXM-18-50-90-36-AA30-F4-3	18	5000	90	118	90	80	88	103	500mA	36	18	2678
										700mA	36	25.2	3578
										900mA	36	32.4	4525
										1150mA	36	41.4	5655
Taylor-Made APP 		Call us and a representative will meet you, we will build together a TAYLOR-MADE APP suited especially for your business.											

* Due to Rapid development in the LED market, please ask for the latest version of data sheet.



SAIL

This flexible and elegant design, simple and pleasant for the eye, make the light almost invisible. Focusing only on your product.



1.5 kg

SAIL



Product	Part #	LES mm	Cct	Min CRI	GAI BB15	CQS	R9	Rf	Rg	Drive	Current	Volt	Watt	Lumens
Sail 2700K	CXM-18-27-90-36-AA30-F4-3	18	2700	90	118	90	90	88	103	500mA	36	18	2340	
										700mA	36	25.2	3024	
										900mA	36	32.4	3855	
										1150mA	36	41.4	4554	
Sail 3000K	CXM-18-30-90-36-AA30-F4-3	18	3000	90	118	90	80	88	103	500mA	36	18	2520	
										700mA	36	25.2	3400	
										900mA	36	32.4	4185	
										1150mA	36	41.4	4968	
Sail 3000K	CXM-18-30-95-36-AA30-F4-3	18	3000	95	118	90	90	88	103	500mA	36	18	2368	
										700mA	36	25.2	3196	
										900mA	36	32.4	3910	
										1150mA	36	41.4	4670	
Sail 3500K	CXM-18-30-95-36-AA30-F4-3	18	3500	90	118	90	80	88	103	500mA	36	18	2610	
										700mA	36	25.2	3578	
										900mA	36	32.4	4270	
										1150mA	36	41.4	5382	
Sail 3500K	CXM-18-35-95-36-AA30-F4-3	18	3500	95	118	90	90	88	103	500mA	36	18	2454	
										700mA	36	25.2	3364	
										900mA	36	32.4	4013	
										1150mA	36	41.4	5056	
Sail 4000K	CXM-18-40-90-36-AA30-F4-3	18	4000	90	118	90	80	88	103	500mA	36	18	2628	
										700mA	36	25.2	3528	
										900mA	36	32.4	4500	
										1150mA	36	41.4	5630	
Sail 4000K	CXM-18-35-95-36-AA30-F4-3	18	4000	95	118	90	90	88	103	900mA	36	32.4	2470	
										1050mA	36	37.8	3316	
										1200mA	36	43.2	4230	
										1400mA	36	50.4	5292	
Sail 5000K	CXM-18-50-90-36-AA30-F4-3	18	5000	90	118	90	80	88	103	500mA	36	18	2678	
										700mA	36	25.2	3578	
										900mA	36	32.4	4525	
										1150mA	36	41.4	5655	
Taylor-Made APP 		Call us and a representative will meet you, we will build together a TAYLOR-MADE APP suited especially for your business.												

* Due to Rapid development in the LED market, please ask for the latest version of data sheet.



1.6 kg

SHELL



In large sales areas, TRIGON creates worlds of experience that motivate customers to spend more time in the shop. Light has an invaluable influence on shop atmosphere, customer orientation and the hierarchy of what people perceive. The SHELL LIGHT provides the right solution, wherever light can be used to increase the desire to buy. So that your customers make the right decision.

SHELL



ANY RAL COLOR

Product	Part #	LES mm	Cct	Min CRI	GAI BB15	CQS	R9	Rf	Rg	Drive Current	Volt	Watt	Lumens
Shell 2700K	CXM-14-27-90-36-AA30-F4-3	14	2700	90	118	90	90	88	103	500mA	36	18	2160
										700mA	36	25.2	2975
										900mA	36	32.4	3823
										1150mA	36	41.4	4885
Shell 3000K	CXM-14-30-90-36-AA30-F4-3	14	3000	90	118	90	80	88	103	500mA	36	18	2340
										700mA	36	25.2	3210
										900mA	36	32.4	4082
										1150mA	36	41.4	4932
Shell 3000K	CXM-14-30-95-36-AA30-F4-3	14	3000	95	118	90	90	88	103	500mA	36	18	2160
										700mA	36	25.2	2995
										900mA	36	32.4	3823
										1150mA	36	41.4	4885
Shell 3200K	CXM-14-32-95-36-AA30-F4-3	14	3200	90	118	90	80	88	103	500mA	36	18	2250
										700mA	36	25.2	3135
										900mA	36	32.4	4050
										1150mA	36	41.4	4968
Shell 3500K	CXM-14-35-90-36-AA30-F4-3	14	3500	90	118	90	80	88	103	500mA	36	18	2340
										700mA	36	25.2	3270
										900mA	36	32.4	4114
										1150mA	36	41.4	5130
Shell 3500K	CXM-14-35-95-36-AA30-F4-3	14	3500	95	118	90	90	88	103	500mA	36	18	2246
										700mA	36	25.2	3130
										900mA	36	32.4	3952
										1150mA	36	41.4	4924
Shell 4000K	CXM-14-40-90-36-AA30-F4-3	14	4000	90	118	90	80	88	103	900mA	36	32.4	2448
										1050mA	36	37.8	3450
										1200mA	36	43.2	4471
										1400mA	36	50.4	5382
Shell 5000K	CXM-14-50-90-36-AA30-F4-3	14	5000	90	118	90	80	88	103	500mA	36	18	2484
										700mA	36	25.2	3470
										900mA	36	32.4	4493
										1150mA	36	41.4	5400
Taylor-Made APP 		Call us and a representative will meet you, we will build together a TAYLOR-MADE APP suited especially for your business.											



BEAM

Compact design, highly efficient light with Glare control.
The Beam fits all projects, whether a high ceiling or a low one. It will emphasize your design and show your products in vivid & deep colors.



1.4 kg

BEAM



ANY RAL COLOUR

Product	Part #	LES mm	Cct	Min CRI	GAI BB15	CQS	R9	Rf	Rg	Drive	Current	Volt	Watt	Lumens
Beam 2700K	CXM-14-27-90-36-AA30-F4-3	14	2700	90	118	90	90	88	103	500mA	36	18	2160	
										700mA	36	25.2	2975	
										900mA	36	32.4	3823	
Beam 3000K	CXM-14-30-90-36-AA30-F4-3	14	3000	90	118	90	80	88	103	500mA	36	18	2340	
										700mA	36	25.2	3210	
										900mA	36	32.4	4082	
Beam 3000K	CXM-14-30-95-36-AA30-F4-3	14	3000	95	118	90	90	88	103	500mA	36	18	2160	
										700mA	36	25.2	2995	
										900mA	36	32.4	3823	
Beam 3200K	CXM-14-32-95-36-AA30-F4-3	14	3200	90	118	90	80	88	103	500mA	36	18	2250	
										700mA	36	25.2	3135	
										900mA	36	32.4	4050	
Beam 3500K	CXM-14-35-90-36-AA30-F4-3	14	3500	90	118	90	80	88	103	500mA	36	18	2340	
										700mA	36	25.2	3270	
										900mA	36	32.4	4114	
Beam 3500K	CXM-14-35-95-36-AA30-F4-3	14	3500	95	118	90	90	88	103	500mA	36	18	2246	
										700mA	36	25.2	3130	
										900mA	36	32.4	3952	
Beam 4000K	CXM-14-40-90-36-AA30-F4-3	14	4000	90	118	90	80	88	103	500mA	36	18	2246	
										700mA	36	25.2	3130	
										900mA	36	32.4	3952	
Beam 5000K	CXM-14-50-90-36-AA30-F4-3	14	5000	90	118	90	80	88	103	500mA	36	18	2484	
										700mA	36	25.2	3470	
										900mA	36	32.4	4493	
Taylor-Made APP 		Call us and a representative will meet you, we will build together a TAYLOR-MADE APP suited especially for your business.												

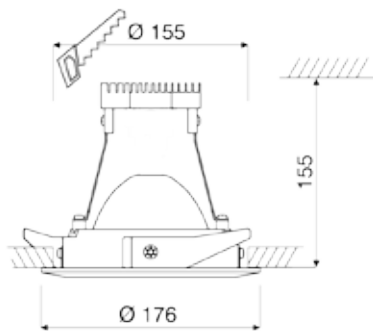

WAVE STRATUS DIRECTIONAL SPOT

Developed for merchandise which requires unique, high-class presentation, and no glare, this series emphasizes your product with great efficiency. It provides both light and atmosphere. It interprets spaces, directs attention, fascinates, structures and presents.



0.9 kg

WAVE STRATUS DIRECTIONAL SPOT



Product	Part #	LES mm	Cct	Min CRI	GAI BB15	CQS	R9	Rf	Rg	Drive Current	Volt	Watt	Lumens
Wave Stratus Directional Spot 2700K	CXM-18-27-90-36-AA30-F4-3	18	2700	90	118	90	90	88	103	500mA	36	18	2340
										700mA	36	25.2	3024
										900mA	36	32.4	3855
										1150mA	36	41.4	4554
Wave Stratus Directional Spot 3000K	CXM-18-30-90-36-AA30-F4-3	18	3000	90	118	90	80	88	103	500mA	36	18	2520
										700mA	36	25.2	3400
										900mA	36	32.4	4185
										1150mA	36	41.4	4968
Wave Stratus Directional Spot 3000K	CXM-18-30-95-36-AA30-F4-3	18	3000	95	118	90	90	88	103	500mA	36	18	2368
										700mA	36	25.2	3196
										900mA	36	32.4	3910
										1150mA	36	41.4	4670
Wave Stratus Directional Spot 3500K	CXM-18-30-95-36-AA30-F4-3	18	3500	90	118	90	80	88	103	500mA	36	18	2610
										700mA	36	25.2	3578
										900mA	36	32.4	4270
										1150mA	36	41.4	5382
Wave Stratus Directional Spot 3500K	CXM-18-35-95-36-AA30-F4-3	18	3500	95	118	90	90	88	103	500mA	36	18	2454
										700mA	36	25.2	3364
										900mA	36	32.4	4013
										1150mA	36	41.4	5056
Wave Stratus Directional Spot 4000K	CXM-18-40-90-36-AA30-F4-3	18	4000	90	118	90	80	88	103	500mA	36	18	2628
										700mA	36	25.2	3528
										900mA	36	32.4	4500
										1150mA	36	41.4	5630
Wave Stratus Directional Spot 4000K	CXM-18-35-95-36-AA30-F4-3	18	4000	95	118	90	90	88	103	900mA	36	32.4	2470
										1050mA	36	37.8	3316
										1200mA	36	43.2	4230
										1400mA	36	50.4	5292
Wave Stratus Directional Spot 5000K	CXM-18-50-90-36-AA30-F4-3	18	5000	90	118	90	80	88	103	500mA	36	18	2678
										700mA	36	25.2	3578
										900mA	36	32.4	4525
										1150mA	36	41.4	5655
Taylor-Made APP 		Call us and a representative will meet you, we will build together a TAYLOR-MADE APP suited especially for your business.											

* Due to Rapid development in the LED market, please ask for the latest version of data sheet.

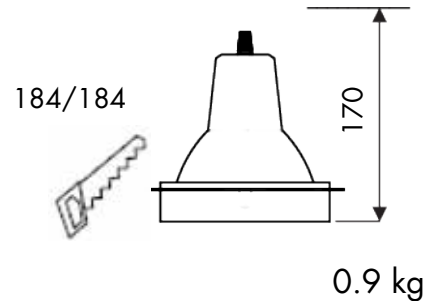

WAVE CARDEN

Flexibility is the key point of our CARDEN. A variety of LEDs and reflectors for any high-demand requirement. 360 deg and led tilt gives us the option for a minimal fixture without any glare – LESS IS MUCH MORE.



WAVE CARDEN



Product	Part #	LES mm	Cct	Min CRI	GAI BB15	CQS	R9	Rf	Rg	Drive	Current	Volt	Watt	Lumens
Wave Carden 2700K	CXM-18-27-90-36-AA30-F4-3	18	2700	90	118	90	90	88	103	500mA	36	18	2340	
										700mA	36	25.2	3024	
										900mA	36	32.4	3855	
										1150mA	36	41.4	4554	
Wave Carden 3000K	CXM-18-30-90-36-AA30-F4-3	18	3000	90	118	90	80	88	103	500mA	36	18	2520	
										700mA	36	25.2	3400	
										900mA	36	32.4	4185	
										1150mA	36	41.4	4968	
Wave Carden 3000K	CXM-18-30-95-36-AA30-F4-3	18	3000	95	118	90	90	88	103	500mA	36	18	2368	
										700mA	36	25.2	3196	
										900mA	36	32.4	3910	
										1150mA	36	41.4	4670	
Wave Carden 3500K	CXM-18-30-95-36-AA30-F4-3	18	3500	90	118	90	80	88	103	500mA	36	18	2610	
										700mA	36	25.2	3578	
										900mA	36	32.4	4270	
										1150mA	36	41.4	5382	
Wave Carden 3500K	CXM-18-35-95-36-AA30-F4-3	18	3500	95	118	90	90	88	103	500mA	36	18	2454	
										700mA	36	25.2	3364	
										900mA	36	32.4	4013	
										1150mA	36	41.4	5056	
Wave Carden 3500K	CXM-18-40-90-36-AA30-F4-3	18	4000	90	118	90	80	88	103	500mA	36	18	2628	
										700mA	36	25.2	3528	
										900mA	36	32.4	4500	
										1150mA	36	41.4	5630	
Wave Carden 3500K	CXM-18-35-95-36-AA30-F4-3	18	4000	95	118	90	90	88	103	900mA	36	32.4	2470	
										1050mA	36	37.8	3316	
										1200mA	36	43.2	4230	
										1400mA	36	50.4	5292	
Wave Carden 5000K	CXM-18-50-90-36-AA30-F4-3	18	5000	90	118	90	80	88	103	500mA	36	18	2678	
										700mA	36	25.2	3578	
										900mA	36	32.4	4525	
										1150mA	36	41.4	5655	
Taylor-Made APP 		Call us and a representative will meet you, we will build together a TAYLOR-MADE APP suited especially for your business.												

* Due to Rapid development in the LED market, please ask for the latest version of data sheet.



ANY RAL COLOUR



Recessed, suspended or ceiling mount, this timeless aluminum line of light will distinguish your store and lead the traffic of your clients.


* Due to Rapid development in the LED market, please ask for the latest version of data sheet.

WAVE CARDEN SMALL SINGLE




0.5. kg

WAVE CARDEN SMALL DUAL



0.9. kg

WAVE CARDEN SMALL TRIPLE

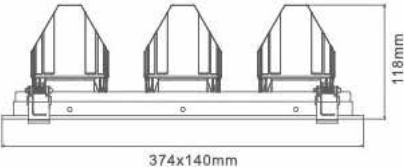

1.3 kg


WAVE CARDEN SMALL

Every brand has its own unique qualities that need to be presented in the right light. This in turn means that the lighting is not only positive in terms of shop design, product presentation, orientation and customer well-being, it also has a positive, supportive effect on the entire brand identity.

WAVE CARDEN SMALL





Product	Part #	LES mm	Cct	Min CRI	GAI BB15	CQS	R9	Rf	Rg	Drive Current	Volt	Watt	Lumens
Wave Carden Small 2700K	CXM-14-27-90-36-AA30-F4-3	14	2700	90	118	90	90	88	103	500mA	36	18	2160
										700mA	36	25.2	2975
										900mA	36	32.4	3823
											36	41.4	4885
Wave Carden Small 3000K	CXM-14-30-90-36-AA30-F4-3	14	3000	90	118	90	80	88	103	500mA	36	18	2340
										700mA	36	25.2	3210
										900mA	36	32.4	4082
Wave Carden Small 3000K	CXM-14-30-95-36-AA30-F4-3	14	3000	95	118	90	90	88	103	500mA	36	18	2160
										700mA	36	25.2	2995
										900mA	36	32.4	3823
Wave Carden Small 3200K	CXM-14-32-95-36-AA30-F4-3	14	3200	90	118	90	80	88	103	500mA	36	18	2250
										700mA	36	25.2	3135
										900mA	36	32.4	4050
Wave Carden Small 3500K	CXM-14-35-90-36-AA30-F4-3	14	3500	90	118	90	80	88	103	500mA	36	18	2340
										700mA	36	25.2	3270
										900mA	36	32.4	4114
Wave Carden Small 3500K	CXM-14-35-95-36-AA30-F4-3	14	3500	95	118	90	90	88	103	500mA	36	18	2246
										700mA	36	25.2	3130
										900mA	36	32.4	3952
Wave Carden Small 4000K	CXM-14-40-90-36-AA30-F4-3	14	4000	90	118	90	80	88	103	900mA	36	32.4	2448
										1050mA	36	37.8	3450
										1200mA	36	43.2	4471
										1400mA	36	50.4	5382
Wave Carden Small 5000K	CXM-14-50-90-36-AA30-F4-3	14	5000	90	118	90	80	88	103	500mA	36	18	2484
										700mA	36	25.2	3470
										900mA	36	32.4	4493




Call us and a representative will meet you, we will build together a TAYLOR-MADE APP suited especially for your business.

WAVE CARDEN TRIMLESS SINGLE




0.5 kg

WAVE CARDEN TRIMLESS DUAL

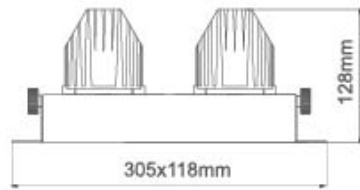

0.9 kg

WAVE CARDEN TRIMLESS TRIPLE

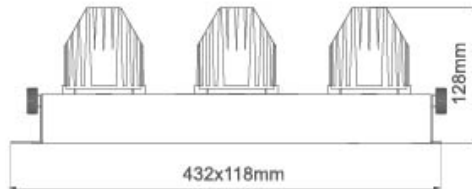

1.3 kg

WAVE CARDEN TRIMLESS

Completely modern and clean design will make your space feels as a class of its own. Clear, hi-end efficient light.

WAVE CARDEN TRIMLESS





ANY RAL COLOUR

Product	Part #	LES mm	Cct	Min CRI	GAI BB15	CQS	R9	Rf	Rg	Drive Current	Volt	Watt	Lumens
Wave Carden Trimless 2700K	CXM-14-27-90-36-AA30-F4-3	14	2700	90	118	90	90	88	103	500mA	36	18	2160
										700mA	36	25.2	2975
										900mA	36	32.4	3823
Wave Carden Trimless 3000K	CXM-14-30-90-36-AA30-F4-3	14	3000	90	118	90	80	88	103	500mA	36	18	2340
										700mA	36	25.2	3210
										900mA	36	32.4	4082
Wave Carden Trimless 3000K	CXM-14-30-95-36-AA30-F4-3	14	3000	95	118	90	90	88	103	500mA	36	18	2160
										700mA	36	25.2	2995
										900mA	36	32.4	3823
Wave Carden Trimless 3200K	CXM-14-32-95-36-AA30-F4-3	14	3200	90	118	90	80	88	103	500mA	36	18	2250
										700mA	36	25.2	3135
										900mA	36	32.4	4050
Wave Carden Trimless 3500K	CXM-14-35-90-36-AA30-F4-3	14	3500	90	118	90	80	88	103	500mA	36	18	2340
										700mA	36	25.2	3270
										900mA	36	32.4	4114
Wave Carden Trimless 3500K	CXM-14-35-95-36-AA30-F4-3	14	3500	95	118	90	90	88	103	500mA	36	18	2246
										700mA	36	25.2	3130
										900mA	36	32.4	3952
Wave Carden Trimless 4000K	CXM-14-40-90-36-AA30-F4-3	14	4000	90	118	90	80	88	103	900mA	36	32.4	2448
										1050mA	36	37.8	3450
										1200mA	36	43.2	4471
Wave Carden Trimless 5000K	CXM-14-50-90-36-AA30-F4-3	14	5000	90	118	90	80	88	103	1400mA	36	50.4	5382
										500mA	36	18	2484
										700mA	36	25.2	3470
Wave Carden Trimless 5000K	CXM-14-50-90-36-AA30-F4-3	14	5000	90	118	90	80	88	103	900mA	36	32.4	4493
										700mA	36	25.2	3470
										900mA	36	32.4	4493


Taylor-Made APP



Call us and a representative will meet you, we will build together a TAYLOR-MADE APP suited especially for your business.



1.7 kg



1.7 kg

WAVE CARDEN SPOT

This unique design take down the needs for three phase track. With the most advanced heat management you can direct the spot to any direction, gaining your up-to-date design.

WAVE CARDEN SPOT





ANY RAL COLOR

Product	Part #	LES mm	Cct	Min CRI	GAI BB15	CQS	R9	Rf	Rg	Drive	Current	Volt	Watt	Lumens
Wave Carden Spot 2700K	CXM-14-27-90-36-AA30-F4-3	14	2700	90	118	90	90	88	103	500mA	36	18	2160	
										700mA	36	25.2	2975	
										900mA	36	32.4	3823	
Wave Carden Spot 3000K	CXM-14-30-90-36-AA30-F4-3	14	3000	90	118	90	80	88	103	500mA	36	18	2340	
										700mA	36	25.2	3210	
										900mA	36	32.4	4082	
Wave Carden Spot 3000K	CXM-14-30-95-36-AA30-F4-3	14	3000	95	118	90	90	88	103	500mA	36	18	2160	
										700mA	36	25.2	2995	
										900mA	36	32.4	3823	
Wave Carden Spot 3200K	CXM-14-32-95-36-AA30-F4-3	14	3200	90	118	90	80	88	103	500mA	36	18	2250	
										700mA	36	25.2	3135	
										900mA	36	32.4	4050	
Wave Carden Spot 3500K	CXM-14-35-90-36-AA30-F4-3	14	3500	90	118	90	80	88	103	500mA	36	18	2340	
										700mA	36	25.2	3270	
										900mA	36	32.4	4114	
Wave Carden Spot 3500K	CXM-14-35-95-36-AA30-F4-3	14	3500	95	118	90	90	88	103	500mA	36	18	2246	
										700mA	36	25.2	3130	
										900mA	36	32.4	3952	
Wave Carden Spot 4000K	CXM-14-40-90-36-AA30-F4-3	14	4000	90	118	90	80	88	103	900mA	36	32.4	2448	
										1050mA	36	37.8	3450	
										1200mA	36	43.2	4471	
										1400mA	36	50.4	5382	
Wave Carden Spot 5000K	CXM-14-50-90-36-AA30-F4-3	14	5000	90	118	90	80	88	103	500mA	36	18	2484	
										700mA	36	25.2	3470	
										900mA	36	32.4	4493	



Call us and a representative will meet you, we will build together a TAYLOR-MADE APP suited especially for your business.



1.3 kg

WAVE CARDEN – SMALL SPOT

This white series, fitting well with the décor of the store and provides an effective and appealing lighting. The illumination is highlighted and creates a strong impression. The design of the lighting fixture, makes the right choice for all types of retail


WAVE CARDEN – SMALL SPOT




Product	Part #	LES mm	Cct	Min CRI	GAI BB15	CQS	R9	Rf	Rg	Drive Current	Volt	Watt	Lumens
Wave Carden - Small Spot 2700K	CXM-14-27-90-36-AA30-F4-3	14	2700	90	118	90	90	88	103	500mA	36	18	2160
										700mA	36	25.2	2975
										900mA	36	32.4	3823
Wave Carden - Small Spot 3000K	CXM-14-30-90-36-AA30-F4-3	14	3000	90	118	90	80	88	103	500mA	36	18	2340
										700mA	36	25.2	3210
										900mA	36	32.4	4082
Wave Carden - Small Spot 3000K	CXM-14-30-95-36-AA30-F4-3	14	3000	95	118	90	90	88	103	500mA	36	18	2160
										700mA	36	25.2	2995
										900mA	36	32.4	3823
Wave Carden - Small Spot 3200K	CXM-14-32-95-36-AA30-F4-3	14	3200	90	118	90	80	88	103	500mA	36	18	2250
										700mA	36	25.2	3135
										900mA	36	32.4	4050
Wave Carden - Small Spot 3500K	CXM-14-35-90-36-AA30-F4-3	14	3500	90	118	90	80	88	103	500mA	36	18	2340
										700mA	36	25.2	3270
										900mA	36	32.4	4114
Wave Carden - Small Spot 3500K	CXM-14-35-95-36-AA30-F4-3	14	3500	95	118	90	90	88	103	500mA	36	18	2246
										700mA	36	25.2	3130
										900mA	36	32.4	3952
Wave Carden - Small Spot 4000K	CXM-14-40-90-36-AA30-F4-3	14	4000	90	118	90	80	88	103	900mA	36	32.4	2448
										1050mA	36	37.8	3450
										1200mA	36	43.2	4471
										1400mA	36	50.4	5382
Wave Carden - Small Spot 5000K	CXM-14-50-90-36-AA30-F4-3	14	5000	90	118	90	80	88	103	500mA	36	18	2484
										700mA	36	25.2	3470
										900mA	36	32.4	4493



Call us and a representative will meet you, we will build together a TAYLOR-MADE APP suited especially for your business.



IP44

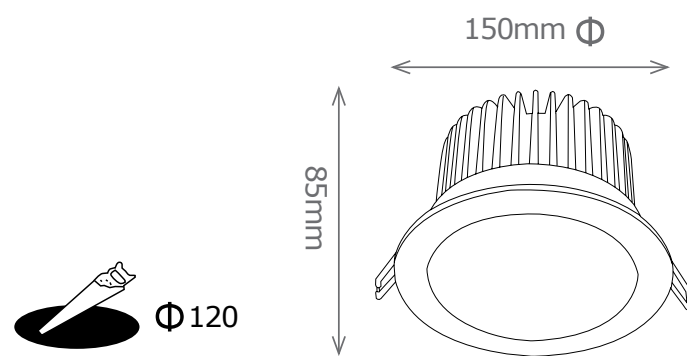

WAVE STRATUS DOWN LIGHT

When you need flood light, with no glare, but still strong enough, this is your solution. Shopping malls and Supermarkets will embrace this solution.

WAVE STRATUS DOWN LIGHT




ANY RAL COLOR


Product	Part #	LES mm	Cct	Min CRI	GAI BB15	CQS	R9	Rf	Rg	Drive Current	Volt	Watt	Lumens
Wave Stratus Down Light 2700K	CXM-14-27-90-36-AA30-F4-3	14	2700	90	118	90	90	88	103	500mA	36	18	2160
										700mA	36	25.2	2975
										900mA	36	32.4	3823
										1150mA	36	41.4	4885
Wave Stratus Down Light 3000K	CXM-14-30-90-36-AA30-F4-3	14	3000	90	118	90	80	88	103	500mA	36	18	2340
										700mA	36	25.2	3210
										900mA	36	32.4	4082
										1150mA	36	41.4	4932
Wave Stratus Down Light 3000K	CXM-14-30-95-36-AA30-F4-3	14	3000	95	118	90	90	88	103	500mA	36	18	2160
										700mA	36	25.2	2995
										900mA	36	32.4	3823
										1150mA	36	41.4	4885
Wave Stratus Down Light 3000K	CXM-14-32-95-36-AA30-F4-3	14	3200	90	118	90	80	88	103	500mA	36	18	2250
										700mA	36	25.2	3135
										900mA	36	32.4	4050
										1150mA	36	41.4	4968
Wave Stratus Down Light 3500K	CXM-14-35-90-36-AA30-F4-3	14	3500	90	118	90	80	88	103	500mA	36	18	2340
										700mA	36	25.2	3270
										900mA	36	32.4	4114
										1150mA	36	41.4	5130
Wave Stratus Down Light 3500K	CXM-14-35-95-36-AA30-F4-3	14	3500	95	118	90	90	88	103	500mA	36	18	2246
										700mA	36	25.2	3130
										900mA	36	32.4	3952
										1150mA	36	41.4	4924
Wave Stratus Down Light 4000K	CXM-14-40-90-36-AA30-F4-3	14	4000	90	118	90	80	88	103	900mA	36	32.4	2448
										1050mA	36	37.8	3450
										1200mA	36	43.2	4471
										1400mA	36	50.4	5382
Wave Stratus Down Light 5000K	CXM-14-50-90-36-AA30-F4-3	14	5000	90	118	90	80	88	103	500mA	36	18	2484
										700mA	36	25.2	3470
										900mA	36	32.4	4493
										1150mA	36	41.4	5400



Call us and a representative will meet you, we will build together a TAYLOR-MADE APP suited especially for your business.



IP44

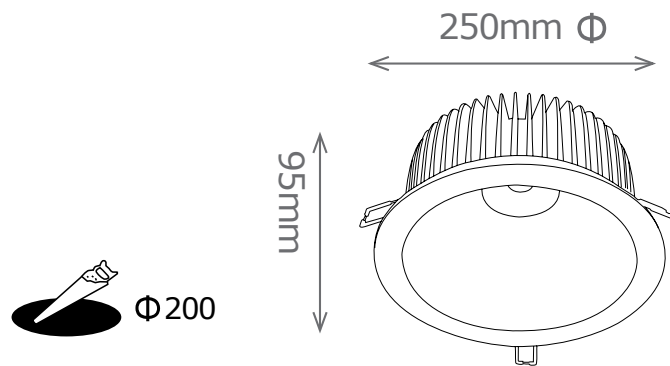

WAVE STRATUS DOWN LIGHT


When you need flood light, with no glare, but still strong enough, this is your solution. Shopping malls and Supermarkets will embrace this solution.

WAVE STRATUS DOWN LIGHT




Product	Part #	LES mm	Cct	Min CRI	GAI BB15	CQS	R9	Rf	Rg	Drive Current	Volt	Watt	Lumens
Wave Stratus Down Light 2700K	CXM-18-27-90-36-AA30-F4-3	18	2700	90	118	90	90	88	103	500mA	36	18	2340
										700mA	36	25.2	3024
										900mA	36	32.4	3855
										1150mA	36	41.4	4554
Wave Stratus Down Light 3000K	CXM-18-30-90-36-AA30-F4-3	18	3000	90	118	90	80	88	103	500mA	36	18	2520
										700mA	36	25.2	3400
										900mA	36	32.4	4185
										1150mA	36	41.4	4968
Wave Stratus Down Light 3000K	CXM-18-30-95-36-AA30-F4-3	18	3000	95	118	90	90	88	103	500mA	36	18	2368
										700mA	36	25.2	3196
										900mA	36	32.4	3910
										1150mA	36	41.4	4670
Wave Stratus Down Light 3500K	CXM-18-30-95-36-AA30-F4-3	18	3500	90	118	90	80	88	103	500mA	36	18	2610
										700mA	36	25.2	3578
										900mA	36	32.4	4270
										1150mA	36	41.4	5382
Wave Stratus Down Light 3500K	CXM-18-35-95-36-AA30-F4-3	18	3500	95	118	90	90	88	103	500mA	36	18	2454
										700mA	36	25.2	3364
										900mA	36	32.4	4013
										1150mA	36	41.4	5056
Wave Stratus Down Light 4000K	CXM-18-40-90-36-AA30-F4-3	18	4000	90	118	90	80	88	103	500mA	36	18	2628
										700mA	36	25.2	3528
										900mA	36	32.4	4500
										1150mA	36	41.4	5630
Wave Stratus Down Light 4000K	CXM-18-35-95-36-AA30-F4-3	18	4000	95	118	90	90	88	103	900mA	36	32.4	2470
										1050mA	36	37.8	3316
										1200mA	36	43.2	4230
										1400mA	36	50.4	5292
Wave Stratus Down Light 5000K	CXM-18-50-90-36-AA30-F4-3	18	5000	90	118	90	80	88	103	500mA	36	18	2678
										700mA	36	25.2	3578
										900mA	36	32.4	4525
										1150mA	36	41.4	5655
Taylor-Made APP 		Call us and a representative will meet you, we will build together a TAYLOR-MADE APP suited especially for your business.											

* Due to Rapid development in the LED market, please ask for the latest version of data sheet.



IP44

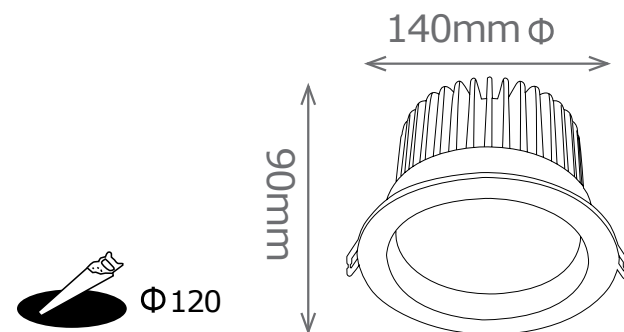

WAVE STRATUS DOWN LIGHT

When you need flood light, with no glare, but still strong enough, this is your solution. Shopping malls and Supermarkets will embrace this solution.


WAVE STRATUS DOWN LIGHT




Product	Part #	LES mm	Cct	Min CRI	GAI BB15	CQS	R9	Rf	Rg	Drive Current	Volt	Watt	Lumens
Wave Stratus Down Light 2700K	CXM-18-27-90-36-AA30-F4-3	18	2700	90	118	90	90	88	103	500mA	36	18	2340
										700mA	36	25.2	3024
										900mA	36	32.4	3855
										1150mA	36	41.4	4554
Wave Stratus Down Light 3000K	CXM-18-30-90-36-AA30-F4-3	18	3000	90	118	90	80	88	103	500mA	36	18	2520
										700mA	36	25.2	3400
										900mA	36	32.4	4185
										1150mA	36	41.4	4968
Wave Stratus Down Light 3000K	CXM-18-30-95-36-AA30-F4-3	18	3000	95	118	90	90	88	103	500mA	36	18	2368
										700mA	36	25.2	3196
										900mA	36	32.4	3910
										1150mA	36	41.4	4670
Wave Stratus Down Light 3500K	CXM-18-30-95-36-AA30-F4-3	18	3500	90	118	90	80	88	103	500mA	36	18	2610
										700mA	36	25.2	3578
										900mA	36	32.4	4270
										1150mA	36	41.4	5382
Wave Stratus Down Light 3500K	CXM-18-35-95-36-AA30-F4-3	18	3500	95	118	90	90	88	103	500mA	36	18	2454
										700mA	36	25.2	3364
										900mA	36	32.4	4013
										1150mA	36	41.4	5056
Wave Stratus Down Light 4000K	CXM-18-40-90-36-AA30-F4-3	18	4000	90	118	90	80	88	103	500mA	36	18	2628
										700mA	36	25.2	3528
										900mA	36	32.4	4500
										1150mA	36	41.4	5630
Wave Stratus Down Light 4000K	CXM-18-35-95-36-AA30-F4-3	18	4000	95	118	90	90	88	103	900mA	36	32.4	2470
										1050mA	36	37.8	3316
										1200mA	36	43.2	4230
										1400mA	36	50.4	5292
Wave Stratus Down Light 5000K	CXM-18-50-90-36-AA30-F4-3	18	5000	90	118	90	80	88	103	500mA	36	18	2678
										700mA	36	25.2	3578
										900mA	36	32.4	4525
										1150mA	36	41.4	5655
Taylor-Made APP 		Call us and a representative will meet you, we will build together a TAYLOR-MADE APP suited especially for your business.											

* Due to Rapid development in the LED market, please ask for the latest version of data sheet.


CLF0019-25

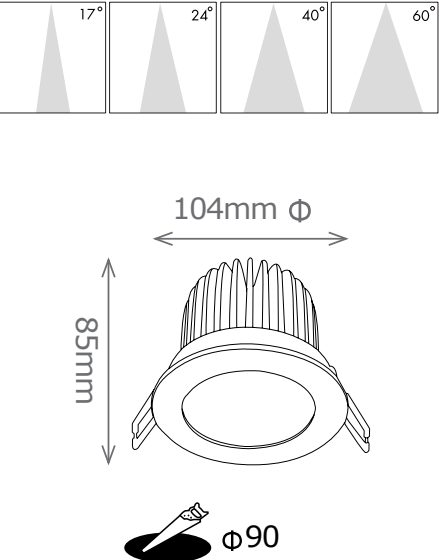

CLF0019-25D

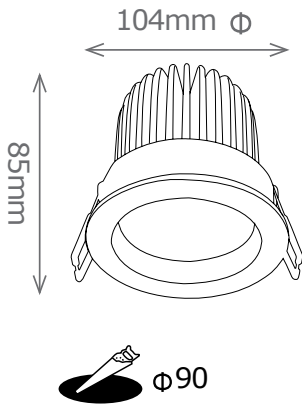

CLF0022-5

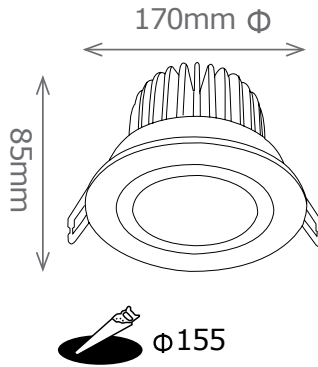

WAVE STRATUS PEARL SERIES




Product	Part #	LES mm	Cct	Min CRI	GAI BB15	CQS	R9	Rf	Rg	Drive Current	Volt	Watt	Lumens
Wave Stratus Pearl Series 2700K	CXM-14-27-90-36-AA30-F4-3	14	2700	90	118	90	90	88	103	500mA	36	18	2160
										700mA	36	25.2	2975
Wave Stratus Pearl Series 3000K	CXM-14-30-90-36-AA30-F4-3	14	3000	90	118	90	80	88	103	500mA	36	18	2340
										700mA	36	25.2	3210
Wave Stratus Pearl Series 3000K	CXM-14-30-95-36-AA30-F4-3	14	3000	95	118	90	90	88	103	500mA	36	18	2160
										700mA	36	25.2	2995
Wave Stratus Pearl Series 3000K	CXM-14-32-95-36-AA30-F4-3	14	3200	90	118	90	80	88	103	500mA	36	18	2250
										700mA	36	25.2	3135
Wave Stratus Pearl Series 3500K	CXM-14-35-90-36-AA30-F4-3	14	3500	90	118	90	80	88	103	500mA	36	18	2340
										700mA	36	25.2	3270
Taylor-Made APP  Call us and a representative will meet you, we will build together a TAYLOR-MADE APP suited especially for your business.													


WAVE STRATUS PEARL SERIES

The PEARL series is suitable for small places that demand efficient light. If it is a jewelry case, small shelves or ambience. This series will support the light balance to complete your design.


LDH0010-A-2

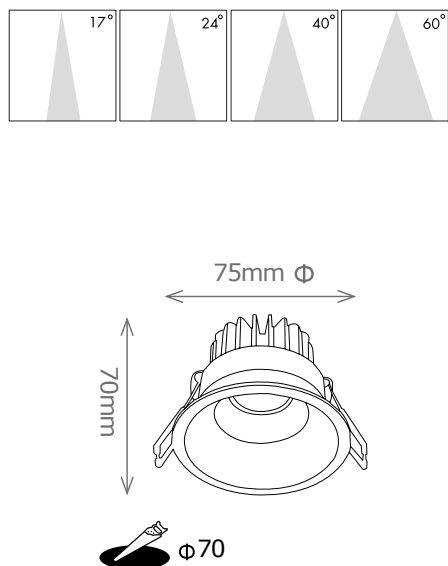

LDH0014-A

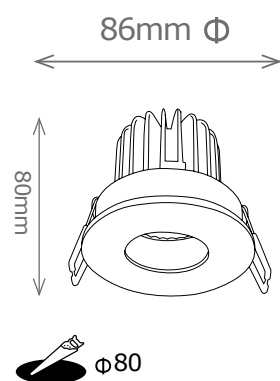

LDH0026-A



WAVE STRATUS PEARL SERIES



Product	Part #	LES mm	Cct	Min CRI	GAI BB15	CQS	R9	Rf	Rg	Drive Current	Volt	Watt	Lumen
Wave Stratus Pearl Series 2700K	CXM-9-27-90-36-AA30-F4-3	9	2700	90	118	90	90	88	103	240mA	36	8.64	1025
										400mA	36	14.4	1708
Wave Stratus Pearl Series 3000K	CXM-9-30-90-36-AA30-F4-3	9	3000	90	118	90	80	88	103	240mA	36	8.64	1105
										400mA	36	14.4	1841
Wave Stratus Pearl Series 3000K	CXM-9-30-95-36-AA30-F4-3	9	3000	95	118	90	90	88	103	240mA	36	8.64	1030
										400mA	36	14.4	1740
Wave Stratus Pearl Series 3000K	CXM-9-35-90-36-AA30-F4-3	9	3000	90	118	90	90	88	103	240mA	36	8.64	1125
										400mA	36	14.2	1874
Wave Stratus Pearl Series 3500K	CXM-14-40-90-36-AA30-F4-3	9	3500	90	118	90	80	88	103	240mA	36	8.64	1190
										400mA	36	14.2	1983
Taylor-Made APP 	Call us and a representative will meet you, we will build together a TAYLOR-MADE APP suited especially for your business.												

* Due to Rapid development in the LED market, please ask for the latest version of data sheet.

WAVE STRATUS PEARL SERIES

The PEARL series is suitable for small places that demand efficient light. If it is a jewelry case, small shelves or ambience. This series will support the light balance to complete your design.


LDH0027-A



LDH0030-A



LDH0031-A

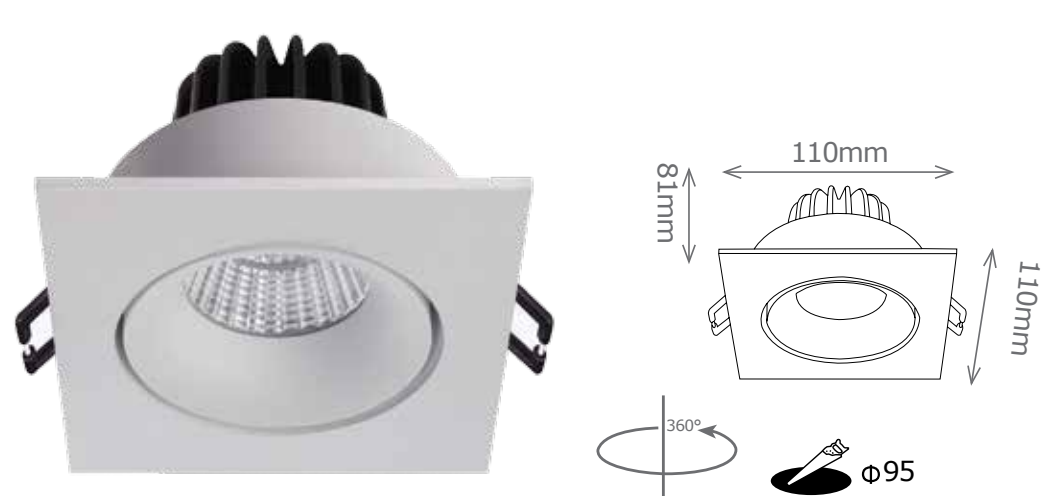

WAVE STRATUS PEARL SERIES



Product	Part #	LES mm	Cct	Min CRI	GAI BB15	CQS	R9	Rf	Rg	Drive Current	Volt	Watt	Lumens
Wave Stratus Pearl Series 2700K	CXM-9-27-90-36-AA30-F4-3	9	2700	90	118	90	90	88	103	240mA	36	8.64	1025
										400mA	36	14.4	1708
Wave Stratus Pearl Series 3000K	CXM-9-30-90-36-AA30-F4-3	9	3000	90	118	90	80	88	103	240mA	36	8.64	1105
										400mA	36	14.4	1841
Wave Stratus Pearl Series 3000K	CXM-9-30-95-36-AA30-F4-3	9	3000	95	118	90	90	88	103	240mA	36	8.64	1030
										400mA	36	14.4	1740
Wave Stratus Pearl Series 3000K	CXM-9-35-90-36-AA30-F4-3	9	3000	90	118	90	90	88	103	240mA	36	8.64	1125
										400mA	36	14.2	1874
Wave Stratus Pearl Series 3500K	CXM-14-40-90-36-AA30-F4-3	9	3500	90	118	90	80	88	103	240mA	36	8.64	1190
										400mA	36	14.2	1983
Taylor-Made APP 		Call us and a representative will meet you, we will build together a TAYLOR-MADE APP suited especially for your business.											

* Due to Rapid development in the LED market, please ask for the latest version of data sheet.

WAVE STRATUS PEARL SERIES

The PEARL series is suitable for small places that demand efficient light. If it is a jewelry case, small shelves or ambience. This series will support the light balance to complete your design.





ARTICLE
821

DIMENSIONS
base Ø 120
plate Ø 270
h 280
tot.h.max 1500

POWER
1 x E27 70W



ARTICLE
830

DIMENSIONS
base Ø 120
plate Ø 280
h 370
tot.h.max 1500

POWER
1 X E27 70W



ARTICLE
831

DIMENSIONS
base Ø 120
plate Ø 280
h 300
depth 340

POWER
1 X E27 70W



ARTICLE
820


DIMENSIONS
base Ø 120
plate Ø 270
h 280
depth 335

POWER
1 x E27 70W

Torino

Product	Part #	LES mm	Cct	Min CRI	GAI BB15	CQS	R9	Rf	Rg	Drive	Current	Volt	Watt	Lumens
Torino 2700K	CXM-14-27-90-36-AA30-F4-3	14	2700	90	118	90	90	88	103	500mA	36	18	2160	
										700mA	36	25.2	2975	
										900mA	36	32.4	3823	
										1150mA	36	41.4	4885	
Torino 3000K	CXM-14-30-90-36-AA30-F4-3	14	3000	90	118	90	80	88	103	500mA	36	18	2340	
										700mA	36	25.2	3210	
										900mA	36	32.4	4082	
										1150mA	36	41.4	4932	
Torino 3000K	CXM-14-30-95-36-AA30-F4-3	14	3000	95	118	90	90	88	103	500mA	36	18	2160	
										700mA	36	25.2	2995	
										900mA	36	32.4	3823	
										1150mA	36	41.4	4885	
Torino 3200K	CXM-14-32-95-36-AA30-F4-3	14	3200	90	118	90	80	88	103	500mA	36	18	2250	
										700mA	36	25.2	3135	
										900mA	36	32.4	4050	
										1150mA	36	41.4	4968	
Torino 3500K	CXM-14-35-90-36-AA30-F4-3	14	3500	90	118	90	80	88	103	500mA	36	18	2340	
										700mA	36	25.2	3270	
										900mA	36	32.4	4114	
										1150mA	36	41.4	5130	
Torino 3500K	CXM-14-35-95-36-AA30-F4-3	14	3500	95	118	90	90	88	103	500mA	36	18	2246	
										700mA	36	25.2	3130	
										900mA	36	32.4	3952	
										1150mA	36	41.4	4924	
Torino 4000K	CXM-14-40-90-36-AA30-F4-3	14	4000	90	118	90	80	88	103	900mA	36	32.4	2448	
										1050mA	36	37.8	3450	
										1200mA	36	43.2	4471	
										1400mA	36	50.4	5382	
Torino 5000K	CXM-14-50-90-36-AA30-F4-3	14	5000	90	118	90	80	88	103	500mA	36	18	2484	
										700mA	36	25.2	3470	
										900mA	36	32.4	4493	
										1150mA	36	41.4	5400	
Taylor-Made APP 		Call us and a representative will meet you, we will build together a TAYLOR-MADE APP suited especially for your business.												



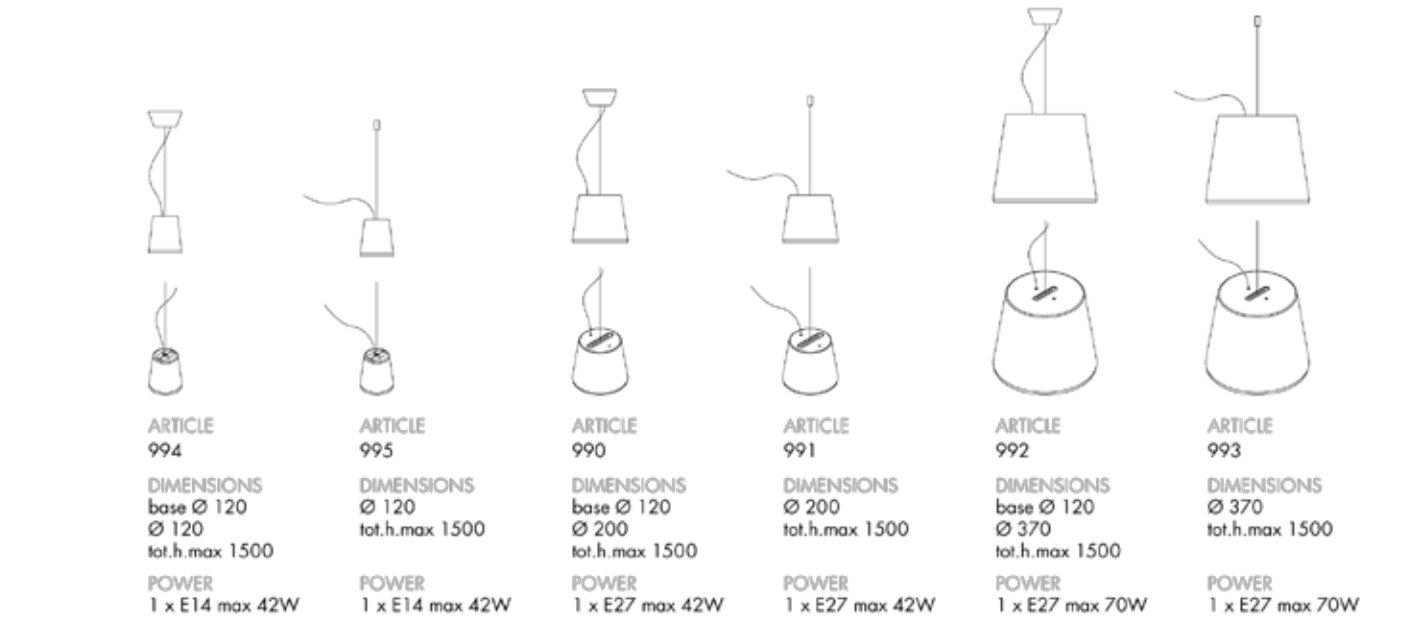

Henry

Product	Part #	LES mm	Cct	Min CRI	GAI BB15	CQS	R9	Rf	Rg	Drive Current	Volt	Watt	Lumens
Henry 2700K	CXM-14-27-90-36-AA30-F4-3	14	2700	90	118	90	90	88	103	500mA	36	18	2160
										700mA	36	25.2	2975
										900mA	36	32.4	3823
										1150mA	36	41.4	4885
Henry 3000K	CXM-14-30-90-36-AA30-F4-3	14	3000	90	118	90	80	88	103	500mA	36	18	2340
										700mA	36	25.2	3210
										900mA	36	32.4	4082
										1150mA	36	41.4	4932
Henry 3000K	CXM-14-30-95-36-AA30-F4-3	14	3000	95	118	90	90	88	103	500mA	36	18	2160
										700mA	36	25.2	2995
										900mA	36	32.4	3823
										1150mA	36	41.4	4885
Henry 3200K	CXM-14-32-95-36-AA30-F4-3	14	3200	90	118	90	80	88	103	500mA	36	18	2250
										700mA	36	25.2	3135
										900mA	36	32.4	4050
										1150mA	36	41.4	4968
Henry 3500K	CXM-14-35-90-36-AA30-F4-3	14	3500	90	118	90	80	88	103	500mA	36	18	2340
										700mA	36	25.2	3270
										900mA	36	32.4	4114
										1150mA	36	41.4	5130
Henry 3500K	CXM-14-35-95-36-AA30-F4-3	14	3500	95	118	90	90	88	103	500mA	36	18	2246
										700mA	36	25.2	3130
										900mA	36	32.4	3952
										1150mA	36	41.4	4924
Henry 4000K	CXM-14-40-90-36-AA30-F4-3	14	4000	90	118	90	80	88	103	900mA	36	32.4	2448
										1050mA	36	37.8	3450
										1200mA	36	43.2	4471
										1400mA	36	50.4	5382
Henry 5000K	CXM-14-50-90-36-AA30-F4-3	14	5000	90	118	90	80	88	103	500mA	36	18	2484
										700mA	36	25.2	3470
										900mA	36	32.4	4493
										1150mA	36	41.4	5400

Taylor-Made APP

Call us and a representative will meet you, we will build together a TAYLOR-MADE APP suited especially for your business.

LIGHTING BOOK
2017 VOL 1